

# DH-PFM811-C

## POC Transmitter



### Features

- Support max 12W HDCVI camera in single channel;
- Support 400m transmission with PFM811-4CH;
- Built-in POC camera and built-in POC XVR are not supported


## Technical Specifications

<b>Model</b>	<b>DH-PFM811-C (PD end)</b>
<b>Video Transmission Properties and Port</b>	
Transmission channel	1 channel/pcs
Transmission signal	Support HDCVI 720P/1080P/4MP (AHD/TVI not supported)
Transmission distance	With PSE,max. 400m(1312.34ft)
Transmission medium	RG59/RG6
Output power of PD end	DC 12V, instantaneous max. power: 12W
Coaxial video interface	Metric BNC
Storage platform	Supporting PSE + non-built-in POC XVR
<b>Protection</b>	
Electrostatic protection	Contact discharge 6k; air discharge 8k
Lighting protection grade	Common mode 4k
<b>Stability</b>	
MTBF	> 5000h
<b>Physical Properties</b>	
Dimension(L*W*H)	79mmx64mmx27mm (3.11"x2.52"x1.06")
Shell material	PC+ABS
Color	White
N.W.	80g(0.18lb)
<b>Environmental</b>	
Operating Temperature	-30°C ~ +60°C (-22°F ~ +140°F)
Storage Temperature	-30°C ~ +80°C (-22°F ~ +176°F)
Humidity	0~95%(non-condensing)

## Order Information

Type	Part Number	Description
HDCVI Accessories	DH-PFM811-C	POC transmitter-PD end
	PFM811-C	POC transmitter-PD end

## Dimensions (mm/inch)

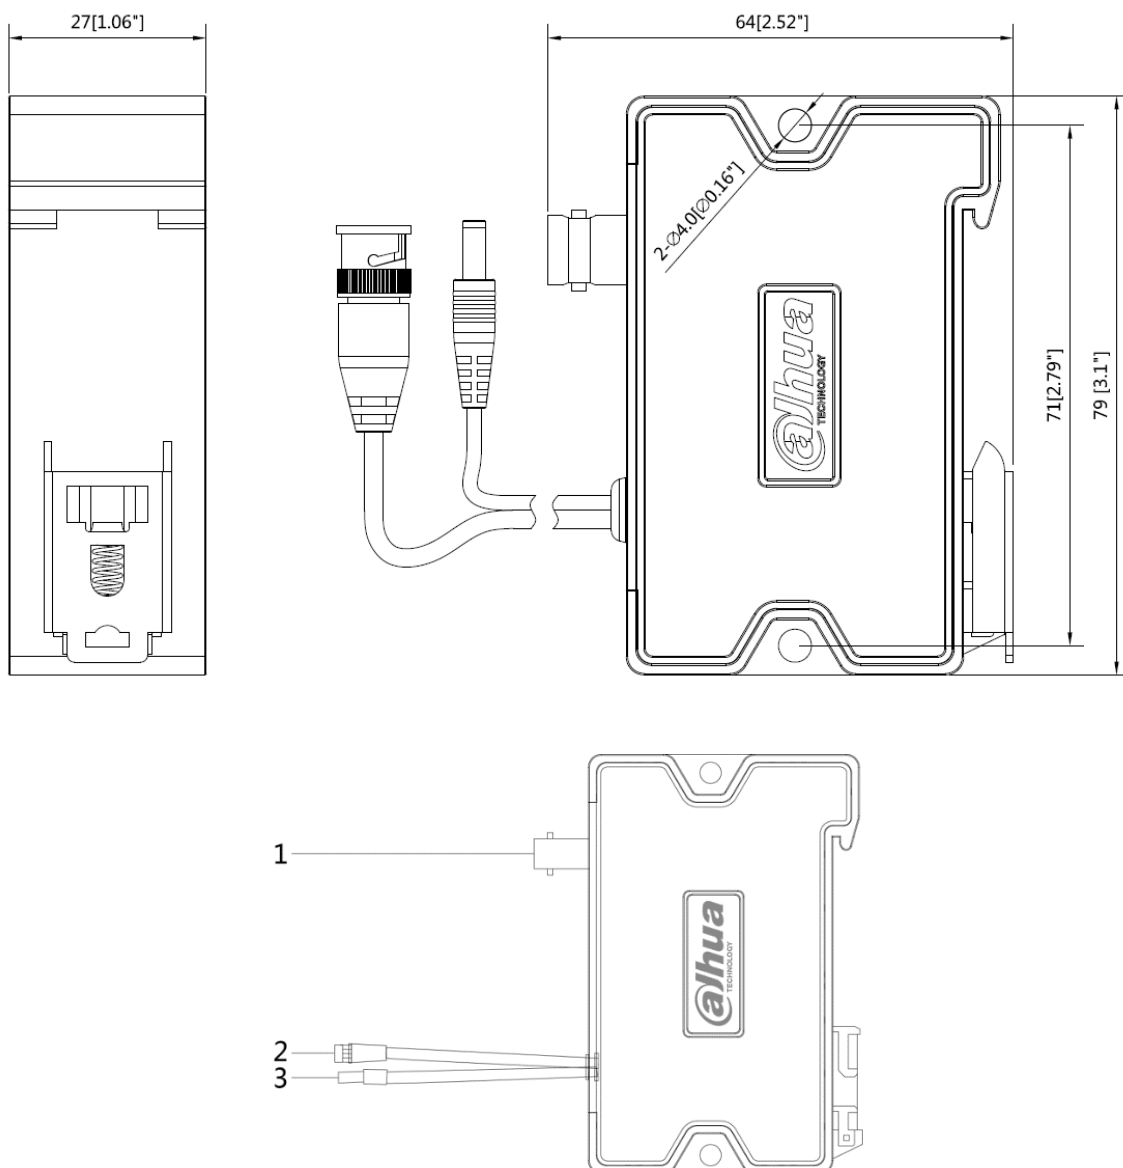

No.	Interface Name	Function Description
1	BNC female	Connect the PD terminal to the PSE terminal
2	BNC male	Connects to the coaxial HD camera and PD terminal.
3	DC male	The output DC12V is supplied to the coaxial HD camera

## Application

