

# DH-TP2105

## HDCVI Video Converter



### Features


- Self-adaptive output HDCVI, HDMI, VGA, CVBS signal
- Lossless real time non-compression transmission
- Support 2 dial switches and indicate 4 Baud rate: 2400b/s, 4800b/s, 9600b/s and 115200b/s
- LED indicators
- Fully enclosed dustproof design

### Specifications

Model	DH-TP2105
<b>Physical Port</b>	
Function Port	3*BNC ports (1/2 channel In/Out(1*HDCVI, 1*CVBS)), 1*HDMI, 1*VGA, 1*RS485
Dial Switch	2 dial switch indicate 4 Baud rates: 2400b/s, 4800b/s, 9600b/s, 115200b/s
<b>Other</b>	
Indicator	Video indicator, power indicator, data indicator
Power	DC12V 2A
Power Consumption	≤15W
Temperature	-10°C ~55°C
Humidity	10%~90% RH
Unit Weight	200g
Dimension	162mm×136.4mm×30mm
Installation	Wall mount

# DH-TP2105

## Dimensions (mm)

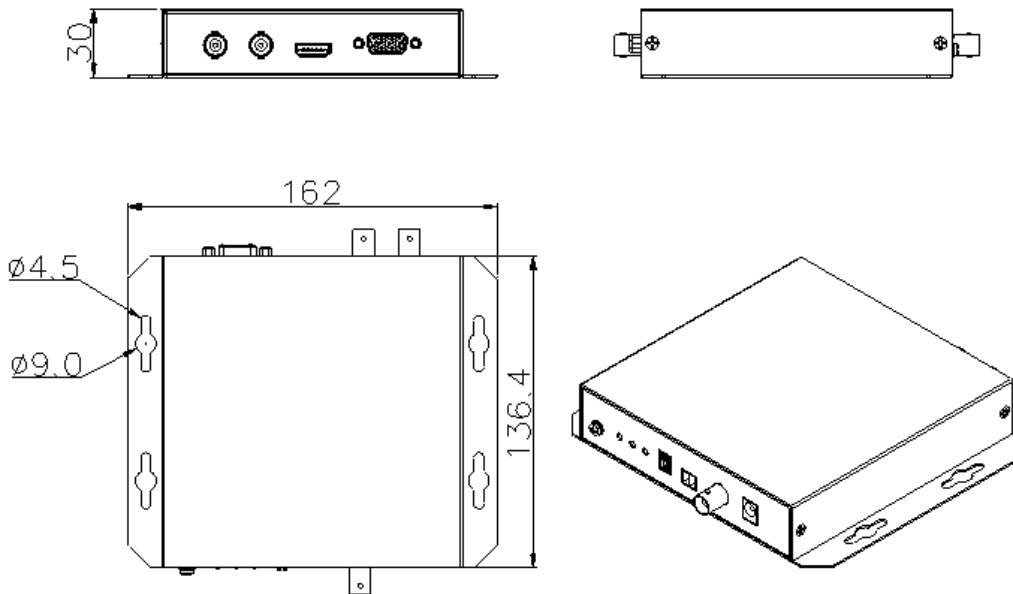

## Application



### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuasecurity.com](http://www.dahuasecurity.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.