

1MP Wi-Fi Villa Outdoor Station



Features

- HD CMOS camera
- Large field of view angle
- Night vision
- Voice indication
- Remote intercom with mobile APP
- Surface mounted


Specifications

Mode		DHI-VTO2111D-WP
System	Main Processor	Embedded Micro Processor
	Operation System	Embedded LINUX OS
Video	Video Compression	H.264
	Image Sensor	1/4" 1MP CMOS
	Lens	2.2mm
	Angle of View	D:125° H:105°
	Day/Night	ICR
Audio	Audio Compression	G.711
	Audio Input	Omnidirectional Mic
	Audio Output	Built-in Speaker
	Bidirectional Talk	Support Dual-way Bidirectional talk
Operation Mode	Keypad	Single Mechanical Button
	Reader	Mifare Card
	Body Approaching	1m
Interface	Door Control	2(1 relay out for main lock, 1 extended by access control module)

DHI-VTO2111D-WP

	Alarm In	2(1ch unlock button, 1ch feedback)
	RS485	1
Network	Wi-Fi	IEEE802.11b/g/n
	Ethernet	10M/100Mbps Self-adaptive
	Network Protocol	TCP/IP
General	Ingress Protection	IP65
	Tamper Switch	1
	Memory Slot	Micro SD, Max 64G
	Installation	Surface & Flush
	Material	Plastic
	Power	DC 12V, PoE(802.3af)
	Power Consumption	Standby ≤1W, Work ≤7W
	Working Environments	- 30°C ~ +60°C
	Relative Humidity	10%~90%RH
	Dimensions	135mm×70.4mm×34.4mm
	Weight	0.4Kg;

Dimensions

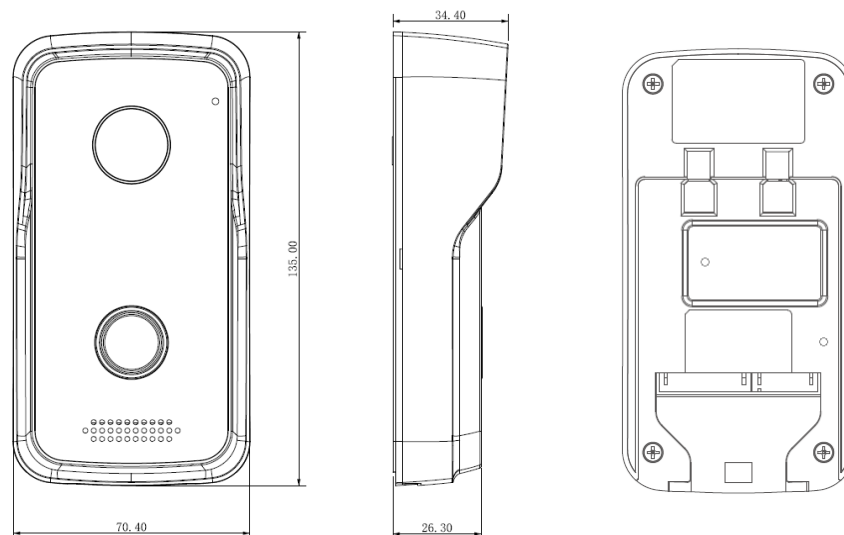


Application

1 – Smart Doorbell


Call Mobile phone APP directly without indoor monitor

DHI-VTO2111D-WP

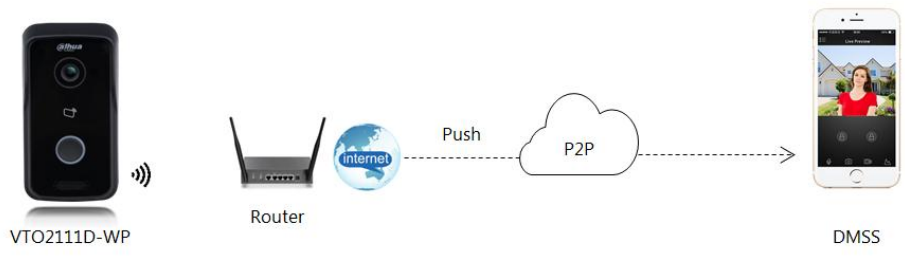

2- Video Intercom

- Color video & audio call
- IPC surveillance
- Alarm integration
- Remote intercom with mobile APP

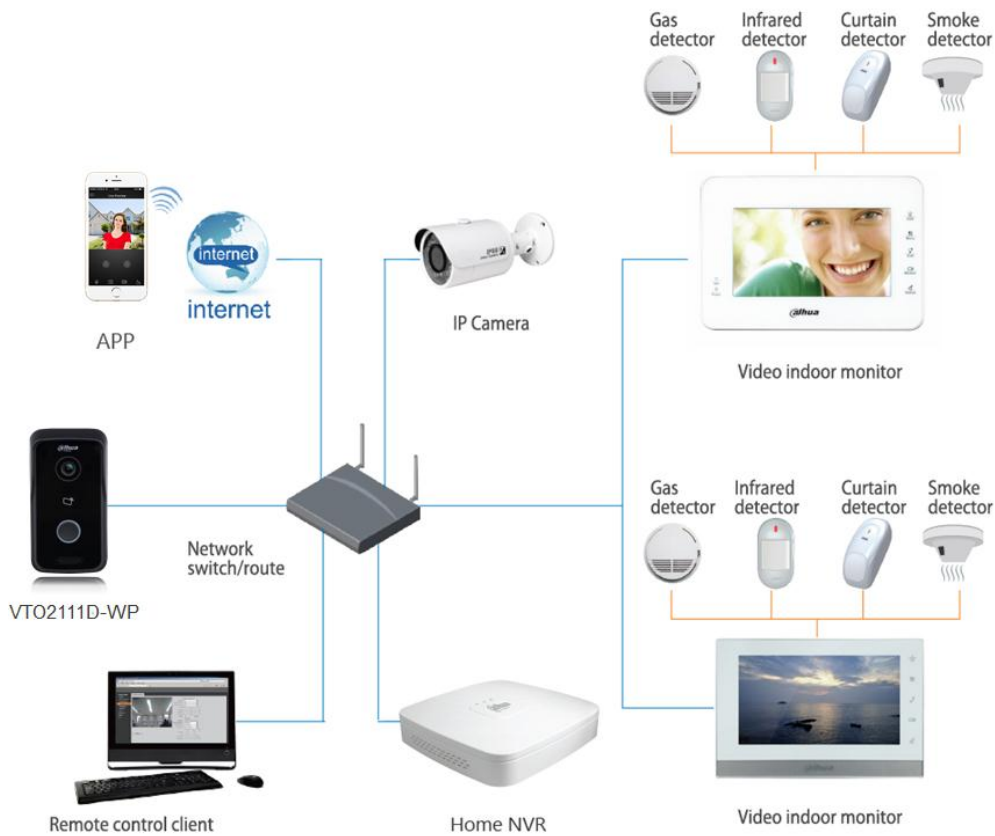

Dahua Technology Co., Ltd.

1199BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.