


ASR1100A ASR1000A ASR1100A-D ASR1000A-D

RFID Reader

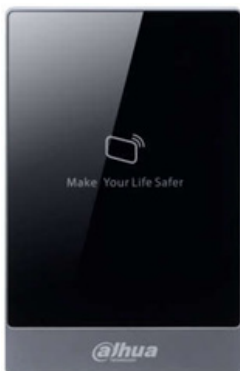

Features

- Wiegand26/34 bits RS-485 protocol
- 13.56MHz(Mifare)
- 125KHz(EM-ID)
- Red and Green LEDs
- Watch dog function ensure device free from halting
- Beep Buzzer and LED indicator
- Surface mounted installation



Technical Specification

Mode	ASR1100A	ASR1000A	ASR1100A-D	ASR1000A-D
------	----------	----------	------------	------------

System

Main Processor	8 Bit
----------------	-------

Read

Read Format	13.56MHz	13.56MHz	125KHz	125KHz
-------------	----------	----------	--------	--------

Read Range	6-8cm (max.)
------------	--------------

Reading time	<0.1s
--------------	-------

Function

Tamper Alarm	Yes
--------------	-----

Interface

To Controller	RS485	Wiegand26/34	RS485	Wiegand26/34
---------------	-------	--------------	-------	--------------

General

LED Display	Blue backlight
-------------	----------------

Beep Tone	Buzzer
-----------	--------

Ingress protection	IP55, water resistant
--------------------	-----------------------

Power Supply	5-16V DC / 100mA/ 300mA/ 800mA
--------------	--------------------------------

Working Environment	30°C~+60°C
---------------------	------------

Working Humidity	≤95%
------------------	------

Dimension(WxDxH)	135mm*86mm*12mm
------------------	-----------------

Weight	0.25Kg
--------	--------

Dimensions

