

DH-HCVR504

HCVR504: 4CH 1080P Smart Box HDCVI DVR



Features

- > Up to 4 cameras with 1080p realtime preview
- > H.264 dual-stream video compression
- > HCVR504: All channel 720P realtime or 1080P non-realtime recording
- > HDMI/VGA simultaneous video output
- > 4 channel synchronous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 1 SATA(2.5-inch Removable HDD) up to 1TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

DH-HCVR504


Technical Specifications

Model	DH-HCVR504	
System		
Main Processor	Embedded processor	
Operating System	Embedded LINUX	
Video		
Input	4 channel, BNC	
Standard	1080P/720P HDCVI Camera	
Display		
Interface	1 HDMI, 1 VGA	
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 800×600	
Display Split	1/4	
Privacy Masking	4 rectangular zones (each camera)	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording		
Video/Audio Compression	H.264/G.711	
Resolution	1080P(1920× 1080)/720P(1280× 720)/960H(960× 576/960× 480)	
Record Rate	Main Stream:	1080P(1~12/15fps)/720P/960H/D1/HD1/2CIF/CIF(1~25/30fps)
	Extra Stream	D1(1~12/15fps)/CIF(1~25/30fps)
Bit Rate	48~4096Kb/s	
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop	
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Video Detection		
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Spot, Snapshot, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Playback & Backup		
Sync Playback	1/4	
Search Mode	Time/Date, MD & Exact search (accurate to second)	
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Internal SATA burner/Network	
Network		

DH-HCVR504

Ethernet	RJ-45 port (10/100M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	1 SATA port, up to 1TB 2.5"
Auxiliary Interface	
USB Interface	2 ports(2 Rear), USB2.0
General	
Power Supply	DC5V/2A
Power Consumption	10W(without HDD)
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa
Dimension(W×D×H)	190mm×130mm×35mm
Weight	300g (without HDD)

System Connection

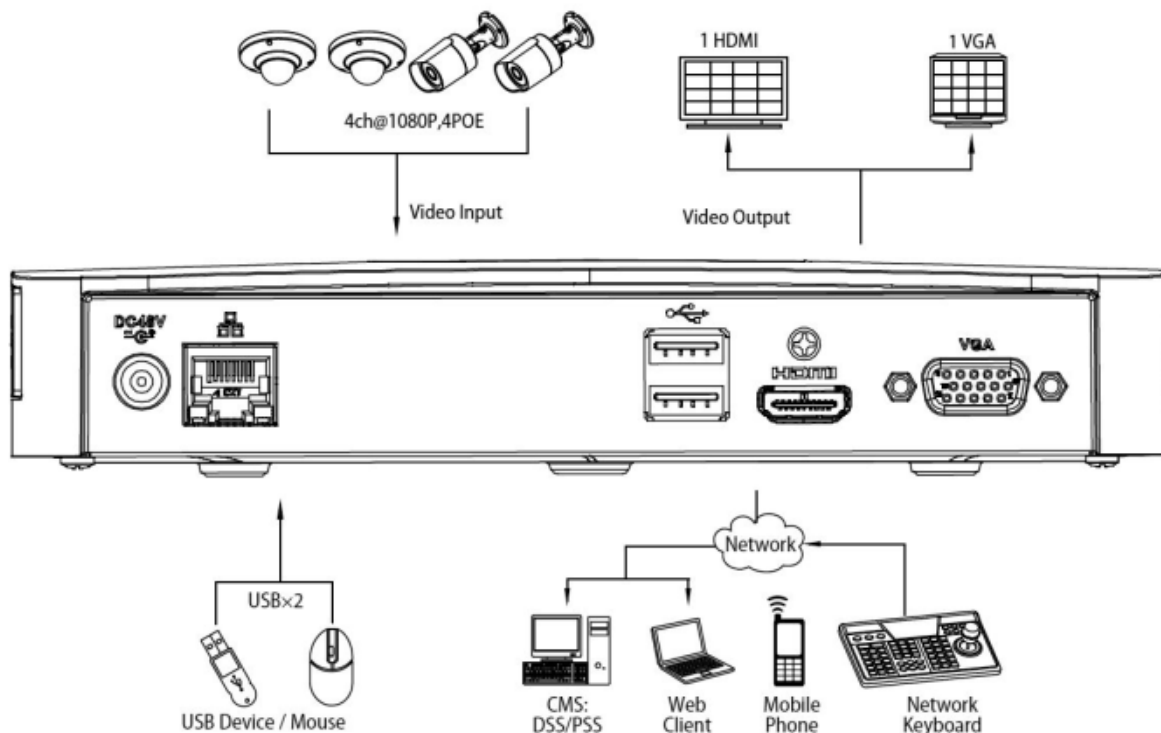

Securitem Ltd.

20181 Cesano Maderno (MB)

Tel: +39-0239198473

Fax: +39-0245503999

Email: info@setik.it

www.setik.it

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.