


# DHI-HCVR8404/08/16L-S3

4/8/16 Channel 1080P 1.5U Digital Video Recorder



- Embedded processor
- H.264+/H.264 video compression
- Support HDCVI/AHD/CVBS video inputs
- Max 64 channels IP camera inputs, each channel up to 12MP
- Max 256Mbps Incoming Bandwidth
- Smart Search and Intelligent Video System

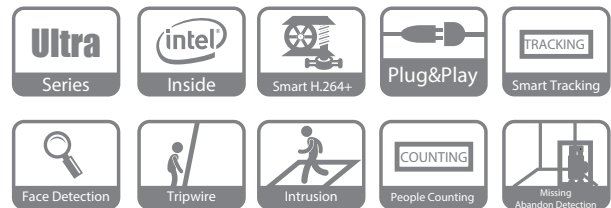

## System Overview

Dahua newest generation digital video recorder adopts HDCVI technology, our in-house technology is an over-coaxial-cable analog HD video transmission standard, allowing long-distance HD transmission at a lower cost to meet the requirements for a complex and large installation. It supports up to 16 channels of HDCVI/CVBS inputs, and 8 channels IP camera additionally, 16 channels local live-view channels, and 16 playback channels.

Designed as a low-cost, easy installation product, this HCVR is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education. It is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and is compatible with ONVIF 2.4.1.

## Functions

### Smart H.264+

Smart Codec, H.264+ can reduce up to 70% bit rate and storage requirements without having to invest in new cameras.

### Fisheye Dewarping

The multiple fisheye dewarping modes to make viewing video easy whether its live or during playback.

### Spot Output

It is made for a secondary monitor. This allows the operator to view one special monitor that assigned to selected cameras or video inputs from higher security areas.

### Intelligent Video System (IVS)

With built-in intelligent video analytics, the HCVR has the ability to detect and analyze moving objects for improved video surveillance. The HCVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed.

### Face Detection

It is a type technology being used in a variety of applications that search or identify individuals which show front cameras.

### Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

### Smart Tracking

The auto tracking PTZ feature automatically tracks a moving target throughout the camera's field of view. This function is ideal for following an object as it moves through airports, parking lots, city centers, or other applications

**Technical Specification**

## System

Main Processor	Embedded Processor
Operating System	Embedded LINUX

## Display

Interface	2 HDMI ,1 VGA,1 TV
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Multi-screen Display	4CH: 1/4/6 8CH: 1/4/8/9 16CH: 1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

## Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Alarm Out, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss and Camera Blank
Alarm input	4/8/16
Relay Output	6
Tracking Trigger Event	N/A

## Playback and Backup

Playback	4CH: 1/4 8CH: 1/4/9 16CH: 1/4/9/16
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network/Internal SATA burner/eSATA Device

## Storage

Internal HDD	4 SATA Ports, up to 8TB capacity for each disk
HDD Mode	Single
eSATA	1 Port

## Auxiliary Interface

Front Cover	N/A
USB	3 USB Ports (1 USB 2.0 , 2 USB 3.0)
RS232	1 port, For PC communication & Keyboard
RS485	1 Port, for PTZ Control

## Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
---------------------	---

## Audio and Video

HDCVI Camera Input	4/8/16 Channel
IP Camera Input	64 Channel, each channel up to 12MP
Audio In/Out	4/1
Two-way Talk	1 Mic In, 1 Mic Out, BNC

## Recording

Compression	H.264+/H.264
Resolution	1080P, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Record Rate	Main stream: 1080P/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps) Sub stream:D1/CIF/QCIF(1~25/30fps)
Bit Rate	32Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 120 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec

## Network

Interface	1 RJ-45 Port (1000M)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search (Support Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 2.4.1, CGI Conformant

## Electrical

Power Supply	AC100V-240V, 50/60Hz
Power Consumption	<40W (Without HDD)

## Environmental

Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 86 ~ 106kpa
Storage Conditions	0°C ~ +50°C (+32°F ~ +122°F), 0 ~ 90% RH

## Construction

Dimensions	1.5U, 440mm×416mm×68mm (17.2" x 16.4" x 2.7")
Net Weight	6kg (13.23lb) (without HDD)
Gross Weight	7kg (15.43lb)
Installation	Desktop installation/Rack-mounted

## Certifications

Certifications	FCC: Part 15 Subpart B ICES 003 Issue 6
	CE: EN 55032: 2012+AC:2013 (Class B) EN 55024 : 2010 EN 61000-3-2 : 2014 EN 50130-4: 2011 EN 61000-3-3 : 2013
	UL 60950-1 and CAN/CSA C22.2 No. 60950-1-07

**Ordering Information**

Type	Part Number	Description
4/8/16 Channel HCVR	DHI-HCVR8404L-S3	4 Channel 1080P 1.5U Digital Video Recorder
	DHI-HCVR8408L-S3	8 Channel 1080P 1.5U Digital Video Recorder
	DHI-HCVR8416L-S3	16 Channel 1080P 1.5U Digital Video Recorder

**Dimensions (mm)**

